



DODGE




Jeep

SRT



Chrysler Group LLC Supplemental Restraint System Post Deployment Inspection & Replacement Matrix 2007-2012

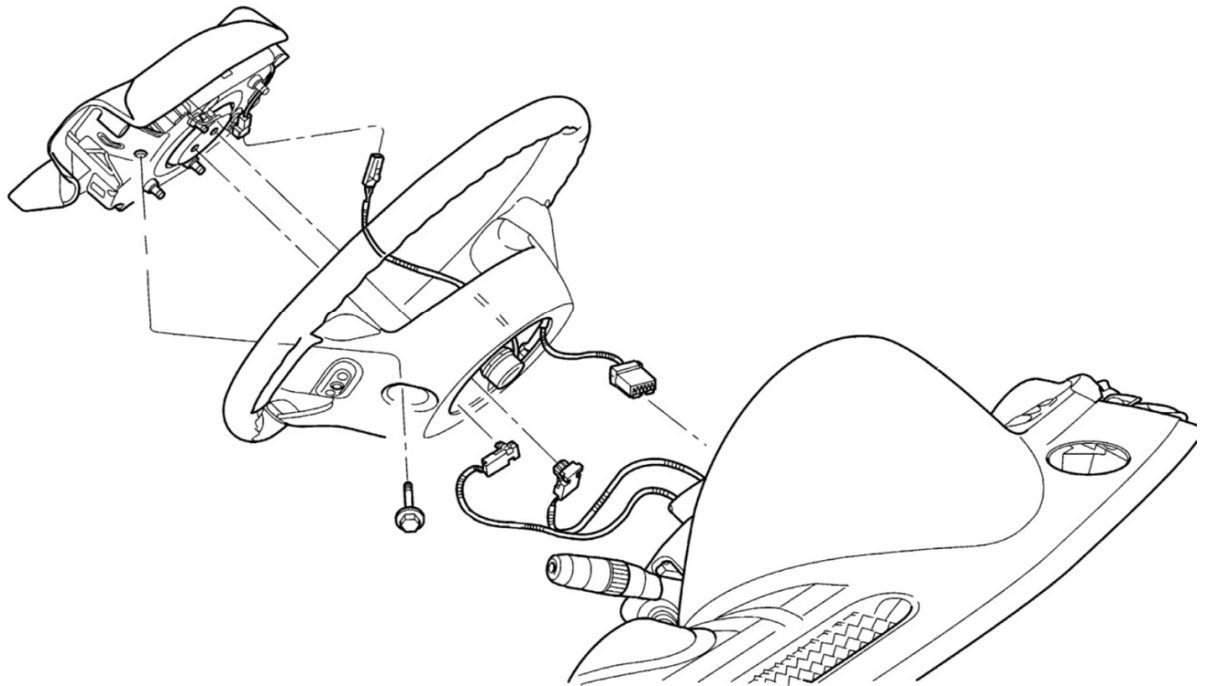

General Information and Warnings

NOTE:

ORC = Occupant Restraint Controller

SRS = Supplemental Restraint System

NOTE: Any vehicle which is to be returned to use following an SRS component deployment must have the deployed restraints replaced. All other vehicle components should be closely inspected following any SRS component deployment, but are to be replaced only as required by the extent of the visible damage

WARNING: Following ANY major vehicle impact damage in the vicinity of an impact sensor or the ORC - It is critical that the mounting surfaces and mounting brackets for the ORC, front impact sensors and side impact sensors located within the proximity of the impact damage be closely inspected and restored to their original conditions. Because the ORC and each impact sensor are used by the SRS to monitor or confirm the direction and severity of a vehicle impact, improper orientation or insecure fastening of these components may cause airbags not to deploy when required, or to deploy when not required. The ORC must be replaced if it or any of the mounting structure immediately surrounding it are damaged in any way.

WARNING: To avoid serious or fatal injury on vehicles equipped with the SRS, never attempt to repair the electrically conductive circuits or wiring components related to the SRS for which there is no MOPAR wiring repair kit. It is important to use ONLY the recommended splicing kit and procedure. For applicable and available MOPAR wiring repair kits, please visit the MOPAR Connector Web Site at the following address on the internet: (<http://dto.vftis.com/mopar/disclaimer.asp>). Inappropriate repairs can compromise the conductivity and current carrying capacity of those critical electrical circuits, which may cause SRS components not to deploy when required, or to deploy when not required. Only minor cuts or abrasions of wire and terminal insulation where the conductive material has not been damaged, or connector insulators where the integrity of the latching and locking mechanisms have not been compromised may be repaired

WARNING: To avoid serious or fatal injury during and following any seat belt or child restraint anchor service, carefully inspect all seat belts, buckles, mounting hardware, retractors, tether straps, and anchors for proper installation, operation, or damage. Replace any belt that is cut, frayed, or torn. Straighten any belt that is twisted. Tighten any loose fasteners. Replace any belt that has a damaged or ineffective buckle or retractor. Replace any belt that has a bent or damaged latch plate or anchor plate. Replace any child restraint anchor or the unit to which the anchor is integral that has been bent or damaged. Never attempt to repair a seat belt or child restraint component. Always replace damaged or ineffective seat belt and child restraint components with the correct, new and unused replacement parts listed in the Chrysler Mopar®

WARNING: To avoid serious or fatal injury on vehicles equipped with airbags, disable the SRS before attempting any steering wheel, steering column, airbag, seat belt tensioner, impact sensor or instrument panel component diagnosis or service. Disconnect and isolate the battery negative (ground) cable, then wait two minutes for the system capacitor to discharge before performing further diagnosis or service. This is the only sure way to disable the SRS. Failure to take the proper precautions could result in accidental airbag

WARNING: To avoid serious or fatal injury, do not attempt to dismantle an airbag unit or tamper with its inflator. Do not puncture, incinerate or bring into contact with electricity. Do not store at temperatures exceeding 93° C (200° F). An airbag inflator unit may contain sodium azide and potassium nitrate. These materials are poisonous and extremely flammable. Contact with acid, water, or heavy metals may produce harmful and irritating gases (sodium hydroxide is formed in the presence of moisture) or combustible compounds. An airbag inflator unit may also contain a gas canister pressurized to over 17.24 KPa (2500 psi). Failure to follow these instructions may result in possible serious or fatal injury.

WARNING: To avoid serious or fatal injury on vehicles equipped with side curtain airbags, disable the SRS before attempting any ORC diagnosis or service. The ORC contains a rollover sensor, which enables the system to deploy the side curtains in the event of a vehicle rollover event. If an ORC is accidentally rolled during service while still connected to battery power, the side curtain airbags will deploy. Disconnect and isolate the battery negative (ground) cable, then wait two minutes for the system capacitor to discharge before performing further diagnosis or service. This is the only sure way to disable the SRS. Failure to take the proper precautions could result in accidental airbag deployment.

WARNING: To avoid potential physical injury or damage to sensitive electronic circuits and systems, always disconnect and isolate the battery negative (ground) cable and the positive cable, then ground the positive cable to discharge the ORC capacitor before performing any welding operations on the vehicle. Failure to take the proper precautions could result in accidental airbag deployment, possible damage to the SRS circuits and components, and possible damage to other electronic circuits and components. Whenever a welding process is being performed within 12 inches (30 centimeters) of an electronic module or wiring harness, then that module or harness should be relocated out of the way, or disconnected. Always protect against component or vehicle damage from weld spatter by using weld blankets and screens.

WARNING: To avoid serious or fatal injury when handling a seat belt tensioner retractor, proper care should be exercised to keep fingers out from under the retractor cover or buckle scabbard and away from the seat belt webbing where it exits from the retractor cover or buckle cable where it exits from the scabbard.

WARNING: To avoid serious or fatal injury, replace all SRS components only with parts specified in the Chrysler Mopar® Parts Catalog. Substitute parts may appear interchangeable, but internal differences may result in inferior occupant protection.

WARNING: To avoid serious or fatal injury, the fasteners, screws, and bolts originally used for the Supplemental Restraint System (SRS) components must never be replaced with any substitutes. These fasteners have special coatings and are specifically designed for the SRS. Any time a new fastener is needed, replace it with the correct fasteners provided in the service package or specified in the Chrysler Mopar®

WARNING: To avoid serious or fatal injury when a steering column has an airbag unit attached, never place the column on the floor or any other surface with the steering wheel or airbag unit face down. Failure to follow these instructions may result in possible serious or fatal injury.

Chrysler 200 (JS)		
2011-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel Pad •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •A, B, and C-Pillar Trim on deployed side •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the seat airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Chrysler 300 (LX)		
2007-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Chrysler 300 (LX)		
2011-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Steering Column Opening Cover 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •A, B, and C-pillar trim on deployed side of vehicle •All seat belt retractors and buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Chrysler Aspen (HG)

2007-2009

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none">•Driver Airbag•Steering Wheel•Clockspring•Steering Column Assembly including Intermediate Shaft/Coupler•Seat Belt Tensioners•All Seat Belt Retractors and Buckles in use	<ul style="list-style-type: none">•Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none">•Passenger Airbag•Passenger Airbag Wiring Harness or Connector*	<ul style="list-style-type: none">•Upper Instrument Panel Pad•Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none">•Side Curtain Airbag•Headliner•Upper A, B, C and D-Pillar Trim on deployed side of vehicle•All Seat Belt Retractors and Buckles in use	<ul style="list-style-type: none">•Sunroof•Sunroof Drain Tubes and Hoses•Side Impact Sensors•Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none">•Lower Anchors and Tether for Children (LATCH)•Inspect all Trim Panels•Occupant Restraint Controller and mounting location

***Must use approved wire crimping tool**

Chrysler Crossfire (ZH)		
2007-2008		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate shaft/Coupler •Seat Belt Tensioners •Seat Belt Buckles in use 	<ul style="list-style-type: none"> •Airbag Control Module •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel Top Pad •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Passenger Airbag mounting locations on Instrument Panel Structure
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Both driver and passenger Knee Blocker Airbags •Instrument Panel 	
When only the Seat Belt Tensioners have deployed	<ul style="list-style-type: none"> •Seat Belt Tensioners •Buckles in use 	
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Airbag Trim Cover •Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Side Impact Sensors
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Airbag Control Module and mounting location
*Must use approved wire crimping tool		

Chrysler Pacifica (CS)		
2007-2008		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Seat weight bladder and sensor •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel Top Pad assembly •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Occupant Classification Module (OCM) •Seat Weight Bladder and Sensor
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Knee Blocker Airbag Trim Cover •Instrument Panel and Top Pad 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
*Must use approved wire crimping tool		

Chrysler PT Cruiser (PT)		
2007-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Airbag Cover •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Knee Blocker Airbag Trim Cover •Instrument Panel 	
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Complete Seat Back Assembly •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Occupant Classification Module(OCM) •Seat Weight Sensor •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Chrysler Sebring (JS)		
2007-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel Pad •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 only)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

**Chrysler
Town & Country (RS)
2007**

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel and Pad assembly •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Under Steering Column Cover •Instrument Panel and Pad assembly 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Side impact sensor •Seat weight bladder and sensor •Seat needs to be recalibrated •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

Note: After an impact event, either front, rear, or side, the Occupant Classification System (OCS) components need to be inspected and replaced if found to be damaged. These components include the Occupant Classification Module (OCM), Passenger Airbag ON/Off Indicator, Seat Weight Bladder and Sensor. Whether replaced or not, the OCS must be re-zeroed to make sure that the system is within proper parameters to sense the occupants weight correctly.

***Must use approved wire crimping tool**

**Chrysler
Town & Country (RT)
2008-2012**

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Cover (2008-2010) •Panel, Instrument Upper (2011 and up) •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Inflatable Knee Blocker has deployed (2011 and up)	<ul style="list-style-type: none"> •Knee Blocker Airbag •Airbag Mounting Plate 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Avenger (JS)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel Pad •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Caliber (PM)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Cover (2007-2010) •Instrument Panel Cover (2011 and up) •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Instrument Panel 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover •Seat Wiring Harness 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Caravan (RS)
2007

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front impact sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel and Pad assembly •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Under Steering Column Cover •Instrument Panel and Pad 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

Note: After an impact event, either front, rear, or side, the Occupant Classification System (OCS) components need to be inspected and replaced if found to be damaged. These components include the Occupant Classification Module (OCM), Passenger Airbag ON/Off Indicator, Seat Weight Bladder and Sensor. Whether replaced or not, the OCS must be re-zeroed to make sure that the system is within proper parameters to sense the occupants weight correctly.

***Must use approved wire crimping tool**

Dodge Caravan (RT)		
2008-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Cover (2008-2010) •Panel, Instrument Upper (2011 and up) •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Inflatable Knee Blocker has deployed (2011 and up)	<ul style="list-style-type: none"> •Knee Blocker Airbag •Airbag Mounting Plate 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Challenger (LC)
2008-2012

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed (2011 and up)	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover •Seat Airbag Jumper Wiring Harness •Thermoplastic Chute 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2011 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

***Must use approved wire crimping tool**

Dodge Charger (LX)		
2007-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 only)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Charger (LD)		
2011-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Instrument Panel Steering Column Cover 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-pillar trim on deployed side of vehicle •All seat belt retractors and buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Durango (HB)

2007-2009

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Upper Instrument Panel Pad •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

***Must use approved wire crimping tool**

Dodge Durango (WD)
2011-2012

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Column Control Module/Clockspring (SCCM) •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front impact sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When only the Seat Belt Tensioners have deployed	<ul style="list-style-type: none"> •Seat Belt Tensioners •Seat Belt Buckles in use 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

***Must use approved wire crimping tool**

Dodge Journey (JC)		
2009-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Magnum (LX)		
2007-2008		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Nitro (KA)		
2007-2011		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Door •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Dodge Sprinter (VB)		
2007-2008		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Steering Control Module (SCM)/Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Airbag Control Module
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When only the Seat Belt Tensioners have deployed	<ul style="list-style-type: none"> •Seat Belt Tensioners •Seat Belt Buckles in use 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, and B-Pillar Trim on deployed side of vehicle •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Side Impact Sensors
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Airbag Cover •Seat Belt Tensioners 	<ul style="list-style-type: none"> •Side Impact Sensors •Seat Frame
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Airbag Control Module and mounting location
*Must use approved wire crimping tool		

Dodge Viper (ZB)		
2008-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Wheel •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Fiat 500 (FF)		
2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •Anchor Buckle Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed	<ul style="list-style-type: none"> •Knee Blocker Airbag •Steering Column Opening Cover 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Jeep Commander (XK)		
2007-2010		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring/Steering Control Module (SCM) (2007 Only) •Clockspring (2008-2010) •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Upper Instrument Panel Pad •Passenger Airbag Wiring Harness or Connector* 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Jeep Compass (MK)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Cover (2007-2010) •Instrument Panel Cover (2011 and up) •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover •Seat Wiring Harness 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

**Jeep
Grand Cherokee (WK)
2007-2010**

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring/Steering Control Module (2007) •Clockspring (2008-2010) •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front impact sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Upper Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When only the Seat Belt Tensioners have deployed	<ul style="list-style-type: none"> •Seat Belt Tensioners •Seat Belt Buckles in use 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

**Jeep
Grand Cherokee (WK)
2011-2012**

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Steering Column Control Module (SCCM)/Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front impact sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Instrument Panel •Passenger Airbag Wiring Harness or Connector* 	
When Inflatable Knee Blocker has deployed (if equipped)	<ul style="list-style-type: none"> •Knee Blocker Airbag •Instrument Panel 	
When only the Seat Belt Tensioners have deployed	<ul style="list-style-type: none"> •Seat Belt Tensioners •Seat Belt Buckles in use 	
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Jeep Liberty (KJ-KK)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Mounting Brackets (2007 Only) •Passenger Airbag Door •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Jeep Patriot (MK)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Cover (2007-2010) •Instrument Panel Cover (2011 and up) •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, C and D-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover •Seat Wiring Harness 	<ul style="list-style-type: none"> •Seat Belt Tensioners
When the Active Head Restraint (AHR) has deployed (2010 and up)		<ul style="list-style-type: none"> •Active Head Restraint units that are undamaged are designed with the intention of reuse.
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Jeep Wrangler (JK)		
2007-2012		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Door •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Seat Airbag has deployed	<ul style="list-style-type: none"> •Seat Airbag •Seat Back Frame •Seat Back Foam •Seat Back Trim Cover •Seat Wiring Harness (Only 2007) 	<ul style="list-style-type: none"> •Seat Belt Tensioners •Side Impact Sensors
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

Ram Dakota (ND)		
2007-2011		
	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag & Door Assembly •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location
*Must use approved wire crimping tool		

**Ram Full Size
DR-DS, DH-DJ, DC-DD,
D1-D2, DM-DP
2007-2012**

	Replacement Mandatory	Inspection Mandatory
When Driver Airbag has deployed	<ul style="list-style-type: none"> •Driver Airbag •Clockspring •Steering Column Assembly including Intermediate Shaft/Coupler •Seat Belt Tensioners •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Front Impact Sensors •Steering Wheel
When Passenger Airbag has deployed	<ul style="list-style-type: none"> •Passenger Airbag •Passenger Airbag Door - 2007-2008 DR & 2007-2009 DH/DC/D1/DM •Instrument Panel - 2009 and up DS & 2010 and up DJ/DC/DD/D2/DM/DP •Passenger Airbag Wiring Harness or Connector* 	<ul style="list-style-type: none"> •Instrument Panel - 2007-2008 DR & 2007-2009 DH/DC/D1/DM
When Side Curtain Airbag has deployed	<ul style="list-style-type: none"> •Side Curtain Airbag •Headliner •Upper A, B, and C-Pillar Trim on deployed side of vehicle •All Seat Belt Retractors and Buckles in use 	<ul style="list-style-type: none"> •Sunroof •Sunroof Drain Tubes and Hoses •Side Impact Sensors •Seat Belt Tensioners
Any Deployment Event		<ul style="list-style-type: none"> •Lower Anchors and Tether for Children (LATCH) •Inspect all Trim Panels •Occupant Restraint Controller and mounting location

***Must use approved wire crimping tool**

- DR-DS 1500
- DH-DJ 2500 (and 1500 Mega Cab)
- DC-DD 3500 Cab Chassis
- D1-D2 3500 Pickup
- DM-DP 4500/5500