




7-Way Trailer Tow Repair Kit

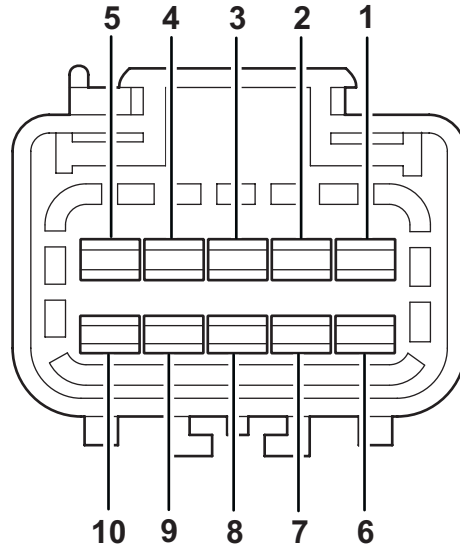

End View of Trailer Connector

CAV	CIRCUIT INFO	PRIMARY FUNCTION
1.	Plugged	-
2.	Dark Green	Right Turn and Stop Lamp
3.	White / Light Green	Back-Up Lamps
4.	Red	Battery (12 volts)
5.	Brown	Park Lamps
6.	Plugged	-
7.	Light Blue	Electric Brake (Optional)
8.	White	Ground (Common)
9.	White	Ground (Common)
10.	Yellow	Left Turn and Stop Lamp

NOTE: Terminal 4 (battery) may be used to charge trailer battery.

CAUTION: Battery isolator unit is not supplied with tow package. Trailer battery may discharge car battery when engine is not running. Interior trailer lamps may be powered with this circuit (up to 10 amps). Overload protection is provided by a self resetting circuit breaker or in-line fuse. This is located in the production trailer tow harness or optional Mopar vehicle trailer tow harness, available from your local dealer.